




SPECIFICATION SHEET

0.0196" Receptive Canvas

1. Construction:

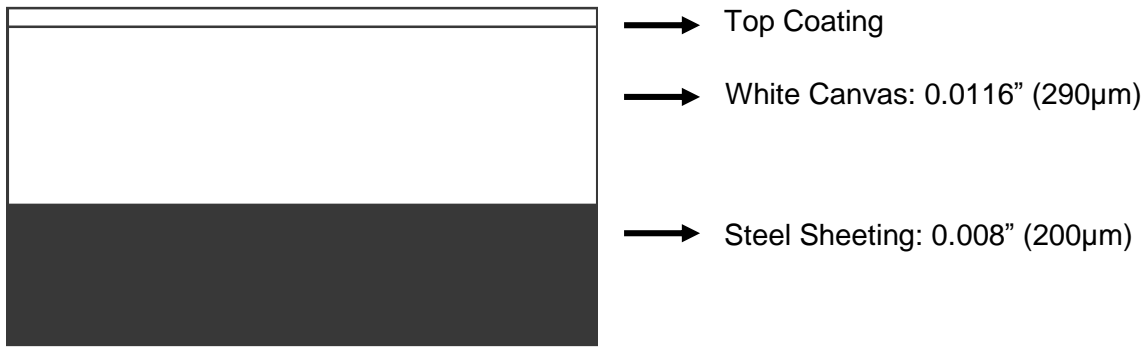

Construction Drawing

2. Applications & Storage:

Application: Anti rust receptive canvas, can be applied with our flexible magnet base. Premium canvas texture is compatible for pigment, UV curable and Latex printing, and good for indoor display, wall cloth and artwork copy.

Working Condition: temperature from 15°C/59°F to 30°C/86°F, and relative humidity from 30% to 60%, daily temperature change within 30°C/86°F, relative humidity change within 30%.

Storage Condition: closed preserve avoiding sunlight, in temperature 10°C/50°F to 35°C/95°F, relative humidity 20% to 70%.

Others: medium-high water resistance, without flame-resistant, antirust.

3. Specification:

3.1. Standard Size

Core: 3 In

Length: 100 Ft

Width: 60 In
 Custom made available

3.2. Physical Data

Thickness (mm)	Weight (g/m ²)	Opacity	Water Resistance	Gloss 60°	Whiteness	Appearance
0.49±0.05	810±80	100%	Medium-High	[2, 5]	[75, 85]	White texture in front, black in back

3.3. Magnetic Data

Lifting Weight: ≥7.0 (g/cm²)

Condition: the standard test tool is isotropic rubber magnet 0.7mm (Holding Strength is about 40g/cm²), test equipment is Tensile Strength Tester.

3.4. Printing Data

(Eco) Solvent	UV	Latex	DYE /Pigment	Offset /Flexo	Screen Print	Toner Based
No	Yes	Yes	Yes	Yes	Yes	No

4. Packing



In the carton



In the pallet