




SPECIFICATION SHEET

.010" UV-PET Magnet Receptive

1. Construction:

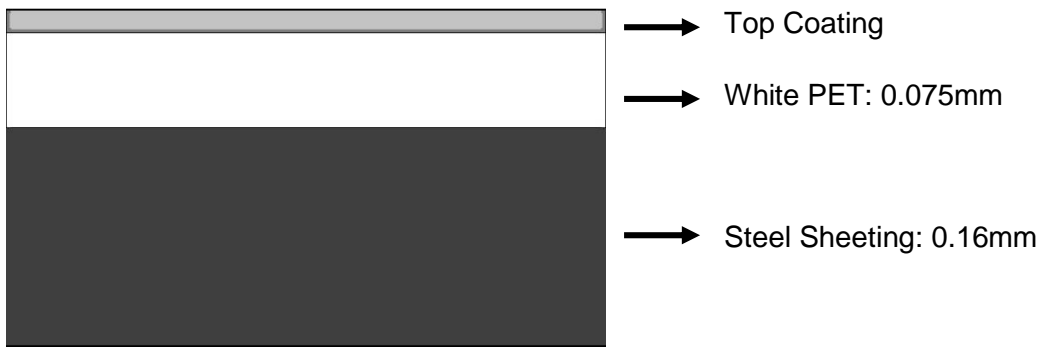

Construction Drawing

2. Applications & Storage:

Print Way: digital inkjet print with UV ink and Latex ink, offset, flexo, screen print

Working Condition: temperature from -20°C to 50°C, and relative humidity from 0% to 80%

Storage Condition: closed preserve avoiding sunlight in normal temperature, temperature from 10°C to 35°C, and relative humidity from 10% to 80%

Others: waterproof, without flame-resistant, antirust

3. Specification:

3.1. Standard Size

Core: 3 In

Length: 100 Ft

Width: 50 In, 54 In, 60 In

Custom made available

3.2. Physical Data

Thickness (mm)	Weight (g/m ²)	Whiteness (Wb)	Brightness (Gs)	Tensile Strength (MPa)		Breaking Elongation Ratio (%)	
				Vertical	Parallel	Vertical	Parallel
0.26 ^{±0.0.3}	535 ^{±50}	[85, 95]	[1, 5]	[40, 50]	[30, 40]	[20, 35]	[20, 35]

3.3. Magnetic Data

Lifting Weight: ≥ 5.0 (g/cm²)

Condition: the standard test tool is isotropic rubber magnet 0.7mm (Holding Strength is about 40g/cm²), test equipment is Tensile Strength Tester.

4. Packing



In carton



In pallet